

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (12/97)

Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1002.2.72

Total Pages

28

First Named Inventor or Application Identifier

Larry Stevens

Express Mail Label No.

EL190177409US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification (Total Pages)
(preferred arrangement set forth below)
 - Descriptive title of the invention
 - Cross References to Related Application
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) (Total Sheets)
4. Oath or Declaration (Total Pages)
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation /divisional with Box 17 completed)
(Note Box 5 below)
 - i. ☐ **DELETION OF INVENTOR(S)**
Signed statement attached deleting inventor(s)
named in prior application, see 37 CFR
1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which
a copy of the oath or declaration is supplied under Box
4b is considered as being part of the disclosure of the
accompanying application and is hereby incorporated by
reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if
applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - a. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application,
Statement(s) Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
if foreign priority is claimed
16. ☒ Other: Express Mail Certificate

17. If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No.:

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

21552

or ☐ Correspondence address below

NAME

Gary D.E. Pierce

ADDRESS

CITY

STATE

ZIP

COUNTRY

TELEPHONE

FAX

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, D.C. 20231.

Express Mail Label No. EL190177409US

PATENT APPLICATION
DOCKET NO. 1002.2.72


UNITED STATES PATENT APPLICATION

of

LARRY STEVENS

for

SYSTEM AND METHOD FOR BONDING
AN ACRYLIC SURFACE TO A FRAME



**SYSTEM AND METHOD FOR BONDING
AN ACRYLIC SURFACE TO A FRAME**

Field of the Invention

5 The present invention relates to a system and method
for bonding an acrylic surface to a frame. More particular-
ly, the present invention is directed to a system and method
for adhesively bonding an acrylic basketball backboard to a
frame structure.

Background

10 As the game of basketball has increased in popularity,
a greater number of people have purchased basketball systems
for use at their homes. Such basketball systems typically
15 comprise at least a pole to which a backboard and a goal is
secured so that the goal is suspended above a playing sur-
face. The basketball backboard can be made of a variety of
materials including various polymers and composites. Clear
acrylic backboards are becoming increasingly popular because
20 they resemble professional backboards.

 There are several problems which must be overcome to
successfully use an acrylic basketball backboard. First,
the backboard must be adequately bonded to a support frame.
Second, there must be sufficient flexibility in the bond to
25 dissipate the impact energy from the backboard to the frame.
If the bond between the backboard and frame is too rigid,

then the backboard can fracture. If the bond is too loose, then the adhesion fails.

One successful resolution of this problem has been the use of two-sided tape having a foam center. One suitable tape, known as "VHB" tape, is commercially available from 3M and Norton. The tape is typically applied to the frame structure, and then the acrylic backboard is pressed on the taped frame.

A significant problem with the use of the two-sided tape described above is the time and labor required to apply the tape to the frame. Currently, substantial manual labor is used to prepare the acrylic backboard surface and frame surface to receive the adhesive tape, to manually lay the tape, and to press the taped backboard and frame together. It would be a substantial improvement in the art to automate the labor-intensive steps in assembly of an acrylic basketball backboard.

Such an automated system and method for bonding an acrylic surface to a frame is disclosed and claimed herein.

Summary of the Invention

The present invention relates to an acrylic basketball backboard assembly and to a method of bonding an acrylic basketball backboard to a frame structure. The assembly includes a basketball backboard frame structure and an acrylic backboard which are bonded together with a suitable elastomeric adhesive. Silicone adhesive is currently pre-

ferred because of its excellent adhesion and flexibility and low cost. The elastomeric adhesive replaces conventional VHB double-sided tape. Applying adhesive to either the backboard or frame structure can be automated and performed by commercially available robotic equipment, thereby improving the efficiency and cost of the basketball backboard assembly process.

A significant problem with most elastomeric adhesives is the long cure time. This problem was solved according to the present invention by using a catalyzed adhesive. The amount of cure catalyst used can vary to provide an optimum set time. Currently, the adhesive is configured to provide a set time in the range from about 5 minutes to 1 hour, and more preferably from about 7 to 15 minutes.

Another problem with elastomeric adhesives was the need to provide controlled and reproducible adhesion and flexibility of the adhesive bond. It was observed that the bond gap directly affected adhesion and flexibility. For example, if the bond gap was too great, good flexibility was observed at the expense of adhesion, with cohesive failure occurring. If the bond gap was too little, good adhesion was obtained at the expense of flexibility. Thus, there was a need to control the bond gap. The currently preferred adhesive bond gap is in the range from about 2 to 2.5 mm.

The bond gap is preferably controlled according to the present invention by including a plurality of bond gap spacers within the adhesive bond. The bond gap spacers are

positioned between the frame bonding surface and the backboard bonding surface to provide the bond gap. A variety of different bond gap spacers can be used according to the present invention. Spherical beads, such as glass microspheres, are currently preferred.

Description of the Drawings

Figure 1 is a cross-sectional view of an acrylic backboard bonded to a frame structure.

Description of the Invention

The present invention is directed to an acrylic basketball backboard assembly and to a method of bonding an acrylic basketball backboard to a frame structure. Figure 1 shows cross-sectional view of a cut-away portion of an acrylic basketball backboard assembly 10. The backboard assembly 10 includes an acrylic backboard 12 bonded to a frame structure 14. The backboard 12 includes a backboard bonding surface 16, and the frame structure 14 includes a frame bonding surface 18. An elastomeric adhesive 20 is sandwiched between the two bonding surfaces 16 and 18. The elastomeric adhesive 20 replaces the VHB double-sided tape currently used with acrylic backboards.

After testing a large number of different elastomeric adhesives from different suppliers, silicone adhesive was preferred because it provides a bond of sufficient strength and flexibility, comparable to that obtained with conven-

tional foam filled, two-sided tape. It was also preferred because of its low cost and availability. Other adhesives, such as urethane, polyurethane, hot melt adhesives, methylmethacrylate, and cyanoacrylate adhesives did not perform as well as silicone in providing the desired balance between bond strength and flexibility and/or were more expensive. Although other elastomeric adhesives can be made suitable for use in the present invention, silicone adhesive is currently preferred and will be discussed below.

Suitable silicone adhesive has been obtained from General Electric (D1-SEA 210) and from Dow Corning (Q3-6093). The commercially available silicone adhesive includes dimethylpolysiloxane as a primary ingredient, with N-propylsilicate, aminopropyltriethoxysilane, 1,3,5-tris(trimethoxysilyl)propylisocyanurate) as minor ingredients.

In a currently preferred embodiment, the silicone adhesive has a bond gap (labelled "A" in Figure 1) in the range from about 2 to 2.5 mm (0.08 to 0.1 inch). If the bond gap is too small, there is not sufficient flexibility in the bond to dissipate the impact energy from the backboard created when the basketball strikes the backboard. The bond between the backboard and frame is too rigid, and the backboard tends to fracture. If the bond gap is too great, there is good flexibility, but the bond is not strong enough. Adhesion failure occurs within the silicone adhesive itself and not at the bond interface with the backboard or frame.

To provide the currently preferred adhesive bond gap, bond gap spacers 22 are located between the frame bonding surface and the backboard bonding surface. Suitable spacers can be any rigid structure having the desired thickness which can maintain the gap between the frame and backboard bonding surfaces. Currently preferred bond gap spacers include spherical beads, and more preferably glass microspheres. Glass microspheres having a diameter in the range from about 2 to 2.5 mm (0.08 to 0.1 inch) function very well. Other bond gap spacers which have been used successfully include weed trimmer line and plastic beads.

One problem with conventional single stage silicone adhesive is its long cure time, typically about 24 hours or more. If the cure time is too great, then an undue amount of manufacturing space is required to store the backboard assemblies while they cure. This problem was solved according to the present invention by using a catalyzed silicone adhesive. Typical commercially available catalyzed silicone adhesives contain two parts: (1) the adhesive itself and (2) a separate catalyst which is mixed with the adhesive to initiate curing. The ratio of catalyst to adhesive is preferably combined to provide a set time in the range from 5 minutes to 1 hour, and more preferably a set time in the range from about 7 to 15 minutes. The set time is defined as the time at which the adhesive sets sufficiently to enable the backboard assembly to be moved and handled.

The present invention also includes a method of bonding an acrylic basketball backboard to a frame structure. The method can be automated and performed by a suitable robotic device, thereby substantially reducing the assembly time and manual labor previously required to prepare acrylic backboard assemblies.

In the method according to the present invention, the backboard and frame bonding surfaces are preferably prepared to receive the elastomeric adhesive. For the frame structure, this is typically performed by roughening the surface. For instance, the surface can be roughened by rubbing a scouring pad, of the type commonly found in kitchens, over the surface. The backboard frame structure is typically painted metal. The paint is preferably a powder coated paint composition.

For the acrylic surface, it must be chemically treated to break the surface tension of the acrylic surface. Although the treatment will vary depending on the adhesive used, it typically will include a chemical mixture of acetone and the adhesive itself. The appropriate acrylic surface preparation is usually provided by the supplier of the elastomeric adhesive.

It has been found that when the acrylic backboard bonding surface contains a printed image, the printing itself provides an adequate surface preparation for the elastomeric adhesive such that a separate backboard surface preparation step is not necessary.

In the method of bonding an acrylic basketball backboard to a frame structure, the elastomeric adhesive can be applied to either the acrylic backboard or frame structure bonding surface. For example, if the adhesive is applied to the bonding surface of the acrylic backboard, then the frame structure is placed against the backboard such that the bonding surface of the frame structure contacts the adhesive. Alternatively, if the adhesive is applied to the bonding surface of the frame structure, then the acrylic backboard is placed against the frame structure such that the bonding surface of the backboard contacts the adhesive.

In either case, a predetermined bond gap is maintained between the backboard bonding surface and the frame bonding surface. As discussed above, the bond gap is important to achieving a suitable balance between adhesion and flexibility. The method can include the step of positioning a plurality of bond gap spacers between the frame bonding surface and the backboard bonding surface to provide the desired adhesive bond gap. The bond gap spacers preferably provide a bond gap in the range from about 2 to 2.5 mm (0.08 to 0.1 inch). Suitable bond gap spacers comprise spherical beads, such as glass microspheres, or other structures which are compatible with the adhesive. Glass microspheres are currently preferred because they are easily dispensed using an automated dispensing device. Furthermore, when silicone adhesive is used, the glass microspheres bond to the adhesive.

The elastomeric adhesive is allowed to cure. A catalyzed adhesive can be used to tailor the set time for elastomeric adhesives.

5 As discussed above, The method includes the step of preparing the frame structure bonding surface and the acrylic backboard bonding surface to receive the elastomeric adhesive. For the frame structure, this is usually a roughening of the surface. For the acrylic backboard, this is usually a chemical treatment specifically formulated for the adhesive being used. However, the step of preparing the acrylic backboard bonding surface to receive the adhesive can include printing an image on the bonding surface with an ink which securely bonds to the bonding surface.

10 Although the bond width (labelled "B" in Figure 1) is not critical to the present invention, it is presently preferred to apply the elastomeric adhesive with a bond width in the range from about 1 cm to 2 cm.

15 To evaluate various elastomeric adhesives, a standard test was developed to measure adhesion and flexibility. A baseline was obtained based upon the currently used double-sided VHB tape available from 3M and Norton. A digital level was used to measure flexibility, and a torque wrench was used to test adhesion.

20 Test specimens consisted of a 3-inch by 6-inch piece of acrylic and a 6-inch long powder coated 1-inch by 1-inch tubing to simulate a backboard frame. The acrylic and tubing were prepped to receive the double-sided VHB tape.

Ten specimens were prepared using 3M brand VHB tape, and ten specimens were prepared using Norton brand VHB tape. The test pieces were centered and bonded with the tape and ran through a compaction roller, to simulate conventional acrylic backboard assembly. The test pieces were allowed to sit 24 hours. The electronic level and torque wrench were then used to obtain a degree of deflection and a torque force at failure. The type of failure was also noted: either cohesive failure (tape fails with adhesion to both substrate), acrylic failure (acrylic does not adhere), and powder coat failure (powder coat does not adhere). All VHB tapes pieces showed cohesive failure.

All twenty tests were averaged to establish a baseline for elastomeric adhesives to meet or exceed. The baseline was a 20° deflection at 125 inch-pounds torque.

Various elastomeric adhesives were tested from the following manufacturers: Ashland, Ciba-Giga, Dapp, Devcon, Dow Corning, Elsworth, General Electric, Goop, Hysol, H.B. Fuller, and Resin Tech Group. It was found that the catalyzed silicone adhesive having the desired bond gap obtained from 25° to 45° deflection at 160 inch-pounds torque.

It will be appreciated that the present invention provides an acrylic basketball backboard which utilizes an elastomeric adhesive, such as silicone adhesive, to replace the conventional double-sided tape. The elastomeric adhesive provides good adhesion and flexibility. Advantageously, the labor-intensive steps in assembly of an acrylic

basketball backboard can be automated using the present invention. Furthermore, the elastomeric adhesive cost can also be less than the cost of the double-sided tape.

5 The present invention may be embodied in other specific forms without departing from its essential characteristics. The described embodiments are to be considered in all respects only as illustrative and not restrictive. The scope of the invention is, therefore, indicated by the appended claims rather than by the foregoing description.

10 What is claimed is:

1. A basketball backboard assembly comprising:
a backboard frame structure having a bonding
surface;

an acrylic backboard having a bonding surface; and

an elastomeric adhesive sandwiched between the
frame bonding surface and the backboard bonding
surface.

2. A basketball backboard assembly according to claim
1, wherein the elastomeric adhesive has a bond gap in the
range from about 2 to 2.5 mm (0.08 to 0.1 inch).

3. A basketball backboard assembly according to claim
1, wherein the elastomeric adhesive is a catalyzed adhesive.

4. A basketball backboard assembly according to claim
3, wherein the elastomeric adhesive is catalyzed silicone
adhesive.

5. A basketball backboard assembly according to claim
3, wherein the elastomeric adhesive is a two-part catalyzed
adhesive in which the two parts are combined in a ratio to
provide a set time in the range from about 7 to 15 minutes.

6. A basketball backboard assembly according to claim 3, wherein the elastomeric adhesive is a two-part catalyzed adhesive in which the two parts are combined in a ratio to provide a set time in the range from about 5 minutes to 1 hour.

7. A basketball backboard assembly according to claim 1, further comprising a plurality of bond gap spacers located between the frame bonding surface and the backboard bonding surface to provide a defined bond gap.

8. A basketball backboard assembly according to claim 7, wherein the plurality of bond gap spacers comprise spherical beads.

9. A basketball backboard assembly according to claim 8, wherein the spherical beads comprise glass microspheres.

10. A basketball backboard assembly according to claim 9, wherein the glass microspheres have a diameter in the range from about 2 to 2.5 mm (0.08 to 0.1 inch).

11. A basketball backboard assembly according to claim 1, wherein the backboard frame structure is metal.

12. A basketball backboard assembly according to claim 1, wherein the backboard frame structure is painted metal.

13. A basketball backboard assembly according to claim 1, wherein the backboard bonding surface contains a printed image.

5 14. A basketball backboard assembly comprising:

a metal backboard frame structure having a bonding surface;

an acrylic backboard having a bonding surface; and

a catalyzed silicone adhesive sandwiched between

10 the frame bonding surface and the backboard bonding surface, wherein the silicone adhesive has a bond gap in the range from about 2 to 2.5 mm, wherein the silicone adhesive is configured to provide a set time in the range from about 5 minutes to 1 hour; and

15 a plurality of bond gap spacers located between the frame bonding surface and the backboard bonding surface to provide the bond gap.

20 15. A basketball backboard assembly according to claim 14, wherein the silicone adhesive is configured to provide a set time in the range from about 7 to 15 minutes.

25 16. A basketball backboard assembly according to claim 14, wherein the plurality of bond gap spacers comprise spherical beads.

17. A basketball backboard assembly according to claim 16, wherein the spherical beads comprise glass microspheres.

18. A basketball backboard assembly according to claim 17, wherein the glass microspheres have a diameter in the range from about 2 to 2.5 mm (0.08 to 0.1 inch).

19. A method of bonding an acrylic basketball backboard to a frame structure comprising:

(a) applying an elastomeric adhesive to a bonding surface of the acrylic backboard;

(b) positioning a frame structure onto the acrylic backboard such that a bonding surface of the frame structure contacts the elastomeric adhesive;

(c) maintaining a predetermined bond gap between the backboard bonding surface and the frame bonding surface; and

(d) allowing the elastomeric adhesive to cure.

20. A method according to claim 19, wherein the elastomeric adhesive is a silicone adhesive.

21. A method according to claim 19, wherein the elastomeric adhesive is a urethane adhesive.

22. A method according to claim 19, further comprising the step of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive.

5 23. A method according to claim 22, wherein the step of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive comprises printing an image on the bonding surface with an ink which securely bonds to the bonding surface.

10 24. A method according to claim 19, further comprising the step of preparing the frame structure bonding surface to receive the elastomeric adhesive.

15 25. A method according to claim 24, wherein the step of preparing the frame structure bonding surface to receive the elastomeric adhesive comprises roughening the frame bonding surface.

20 26. A method according to claim 19, further comprising the step of positioning a plurality of bond gap spacers between the frame bonding surface and the backboard bonding surface to provide the elastomeric adhesive bond gap.

25 27. A method according to claim 26, wherein the bond gap spacers provide a bond gap in the range from about 2 to 2.5 mm (0.08 to 0.1 inch).

28. A method according to claim 26, wherein the bond gap spacers comprise spherical beads.

29. A method according to claim 28, wherein the spherical beads comprise glass microspheres.

30. A method according to claim 19, wherein the elastomeric adhesive is applied to the backboard bonding surface with a bond width in the range from about 1 cm to 2 cm.

31. A method of bonding an acrylic basketball backboard to a frame structure comprising:

(a) applying an elastomeric adhesive to a bonding surface of the frame structure;

(b) positioning the acrylic backboard onto the frame structure such that a bonding surface of the backboard contacts the elastomeric adhesive;

(c) maintaining a predetermined bond gap between the backboard bonding surface and the frame bonding surface; and

(d) allowing the elastomeric adhesive to cure.

32. A method according to claim 31, wherein the elastomeric adhesive is a silicone adhesive.

33. A method according to claim 31, wherein the elastomeric adhesive is a urethane adhesive.

34. A method according to claim 31, further comprising
5 the step of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive.

35. A method according to claim 34, wherein the step
10 of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive comprises chemically treating the acrylic bonding surface to permit the elastomeric adhesive to penetrate the acrylic bonding surface.

36. A method according to claim 34, wherein the step
15 of preparing the acrylic backboard bonding surface to receive the elastomeric adhesive comprises producing an image on the bonding surface with an ink that securely bonds to the bonding surface.

20 37. A method according to claim 31, further comprising the step of preparing the frame structure bonding surface to receive the elastomeric adhesive.

38. A method according to claim 37, wherein the step of preparing the frame structure bonding surface to receive the elastomeric adhesive comprises roughening the frame bonding surface.

5

39. A method according to claim 31, further comprising the step of positioning a plurality of bond gap spacers between the frame bonding surface and the backboard bonding surface to provide the elastomeric adhesive bond gap.

10

40. A method according to claim 39, wherein the bond gap spacers provide a bond gap in the range from about 2 to 2.5 mm (0.08 to 0.1 inch).

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201

**AUTOMATED SYSTEM AND METHOD FOR BONDING
AN ACRYLIC SURFACE TO A FRAME**

Abstract of the Disclosure

A basketball backboard assembly and a method of making
the backboard assembly are disclosed. The assembly includes
a backboard frame structure and an acrylic backboard which
are bonded together with a suitable elastomeric adhesive,
such as a silicone adhesive, providing adequate adhesion and
flexibility. The elastomeric adhesive has a bond gap in the
range from about 2 to 2.5 mm. The adhesive is catalyzed to
provide control of the set time in the range from about 5
minutes to 1 hour. A plurality of bond gap spacers are
located between the frame bonding surface and the backboard
bonding surface to provide the bond gap.

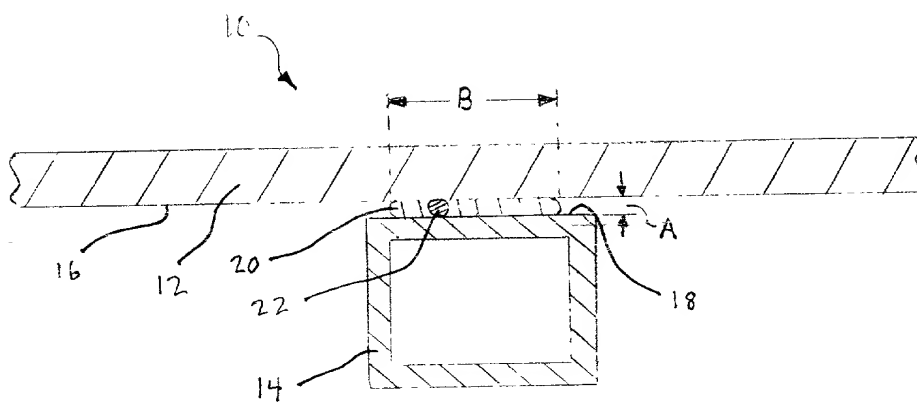


Fig. 1

DECLARATION, POWER OF ATTORNEY AND PETITION

I, Larry Stevens, declare: that I am a citizen of the United States of America; that my residence and post office address is 938 Raymond Road, Fruit Heights, Utah 84037; that I verily believe I am the original, first, and sole inventor of the subject matter of the invention or discovery entitled SYSTEM AND METHOD FOR BONDING AN ACRYLIC SURFACE TO A FRAME, for which a patent is sought and which is described and claimed in the specification attached hereto; that I have reviewed and understand the contents of the above-identified specification, including the claims; and that I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Section 1.56 of Title 37 of the Code of Federal Regulations.

I declare further that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful, false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful, false statements may jeopardize the validity of the application or any patent issuing thereon.

I hereby appoint as my attorneys and/or patent agents those individuals associated with U.S. Patent and Trademark Office Customer No. 21552 with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. All correspondence and telephonic communications should be directed to Evan R. Witt at the address associated with Customer No. 21552.

Wherefore, I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, declaration, power of attorney, and this petition.

Signed at Cedarfield, Utah, this 5th day of
(City) (State)
January, 1998.

Inventor Larry Stevens
Larry Stevens
938 Raymond Road
Fruit Heights, Utah 84037